



# BWA 140 EXT

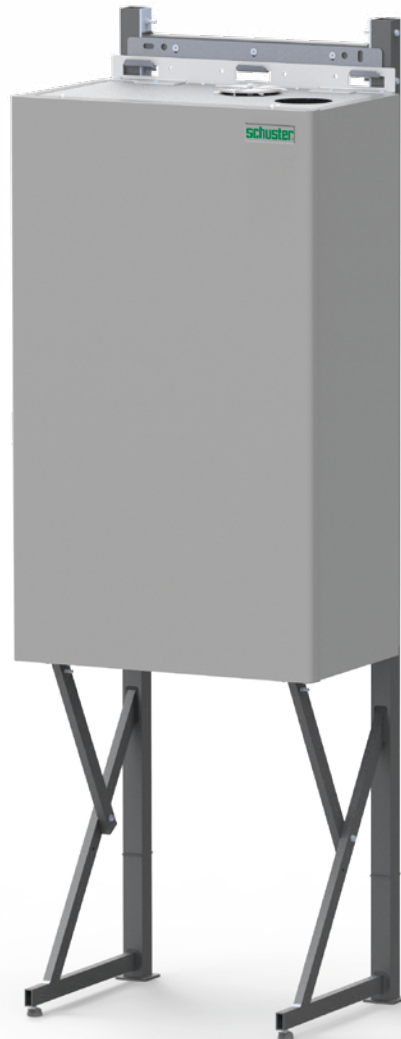


**MODULATING CONDENSING BOILER with double premix low NO<sub>x</sub> burner and double heat exchanger EXPANDABLE IN BATTERY for indoor and outdoor installations (IPX5D)**

OUTPUT RANGE	from 115 to 560 kW (in battery)
EMISSIONS	Class 6 NO <sub>x</sub>
SUPPLY	Natural Gas or LPG
MODELS	140 EXT
SEASONAL EFFICIENCY	 A


Wall hung with dedicated supporting kit  
**available in battery up to 4 units for a total of 560 kW**  
 can be combined both with **MIXING HEADER** and with **PLATE HEAT EXCHANGERS**

## MAIN COMPONENTS

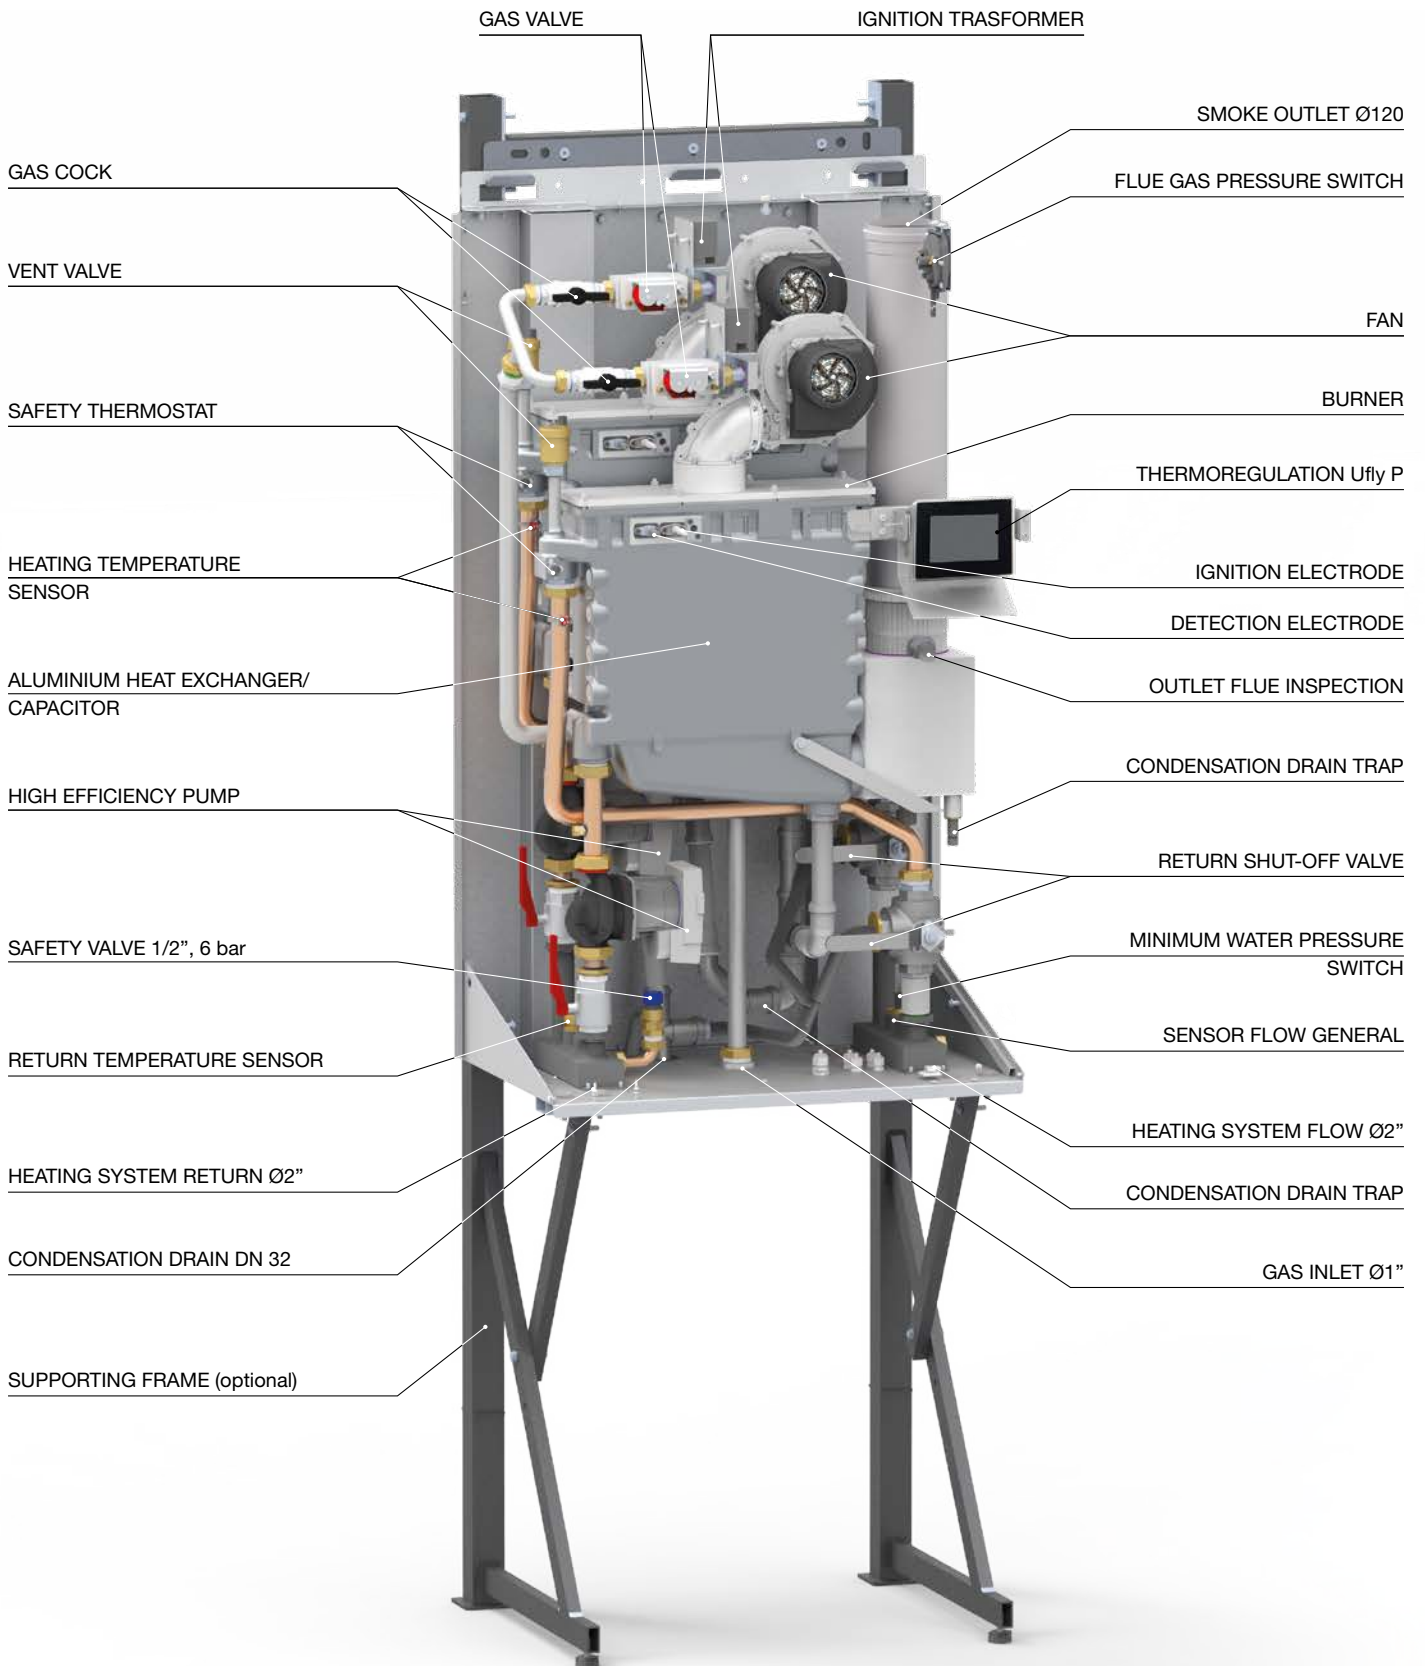

## PRODUCT PLUS VALUES

- **CALIBRATION POSSIBILITY** according to the thermal requirement of the system (possible customization of the requested power)
- **2 complete interceptables THERMAL ELEMENTS**, operating also separately in case of necessity, controlled by the BMM (Burner Module Manager) electronic cards
- **2 LOW WATER CONTENT HEAT EXCHANGERS** in Al/Si/Mg alloy, the best for:
  - 100% wet surfaces of the boiler body
  - for long time guaranteed efficiency, thanks to the absence of scaling
  - reliability, thanks to the optimized circulation that avoids thermal overloads (NTC control's sensors)
  - long lasting, fruit of the multi-year metallurgical Schuster experience
- **2 LOW NO<sub>x</sub> PREMIX MODULATING BURNERS** in class 6, composed by:
  - 2 fans (40 Pa of manometric head) with electronically controlled speed
  - 2 safety gas valves with constant air-gas ratio
  - radiating flame surface in "metallic sponge" (guaranteed operation up to 13 mbar of natural gas pressure)
- **2 MODULATING PUMPS** (one for each thermal element) with antifreeze protection, antijamming and overrun circulation
- **MINIMUM WATER PRESSURE SWITCH**
- Ready for the **ELECTRICAL CONNECTION** of the additional safety devices
- **OPTIONAL HYDRAULIC GROUPS** including:
  - Pipe for installation of safety devices and accessories
  - Differential pressure switch for the control of water circulation
  - Hydraulic connection system
  - Mixing header
- **COMPLETE OUTER CASING FOR OUTDOOR INSTALLATION** in electro-galvanized steel sheet with epoxy-polyester painting
- **CONVERSION KIT** from Nat. Gas to LPG, optional
- **EXPANDIBLE IN CASCADE** up to 1120 kW (8 boilers, 2 group of 4 boiler in cascade)
- **OPTIONAL ACCESSORIES** for cascade installation
- **Kit Gateway P** for Ufly P remote connection (optional)
- **Wall box kit** for Ufly P.

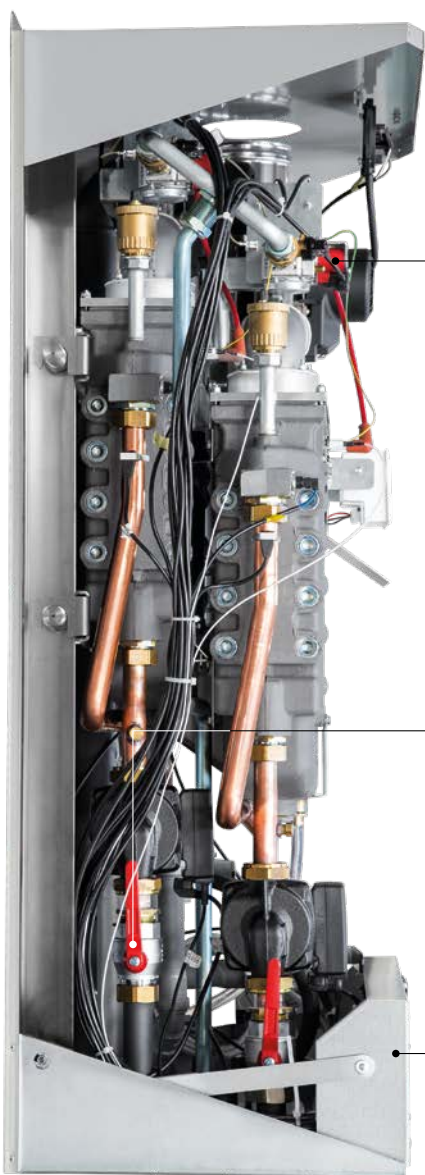

Pumps and gate valves




Group of: fan, modulating gas valve, premix burner




Assembly of the electronic PCBs for the management of the thermal elements and BCM 2.0

View that underlines the particular skew between the 2 thermal elements in order to facilitate the maintenance interventions


DIMENSIONS OF A SINGLE BOILER BWA 140 EXT

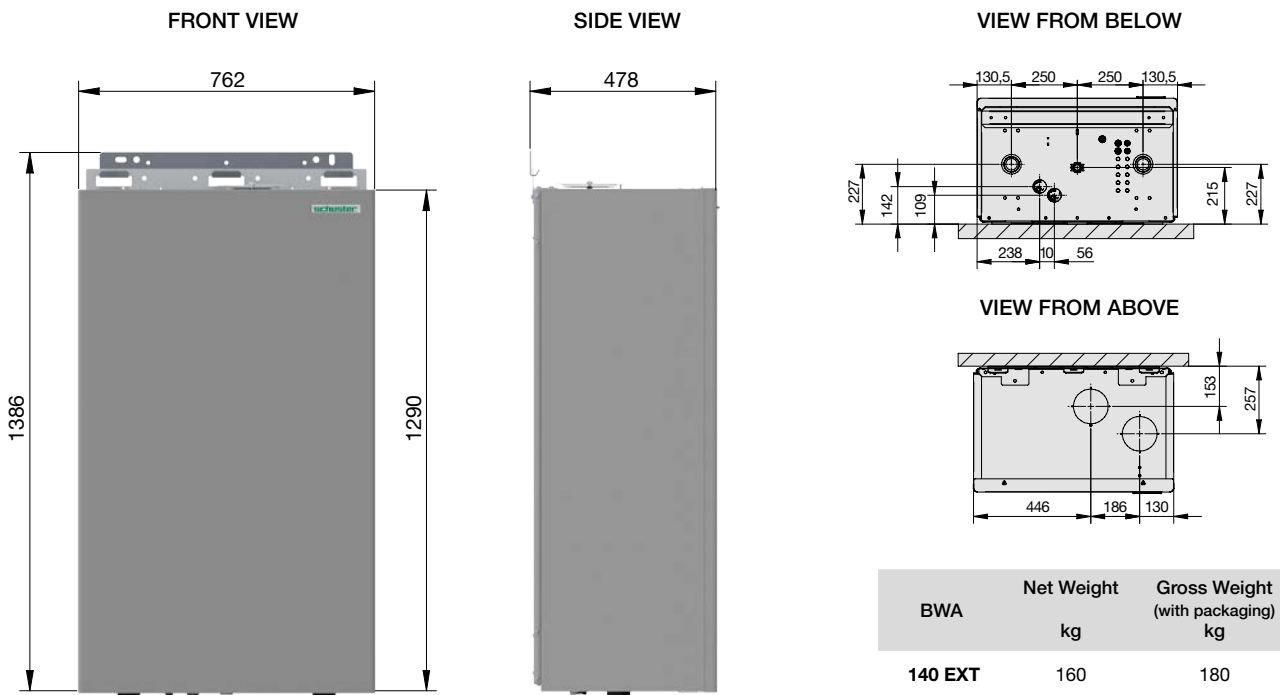

DIMENSIONS WITH SUPPORTING FRAME (optional)

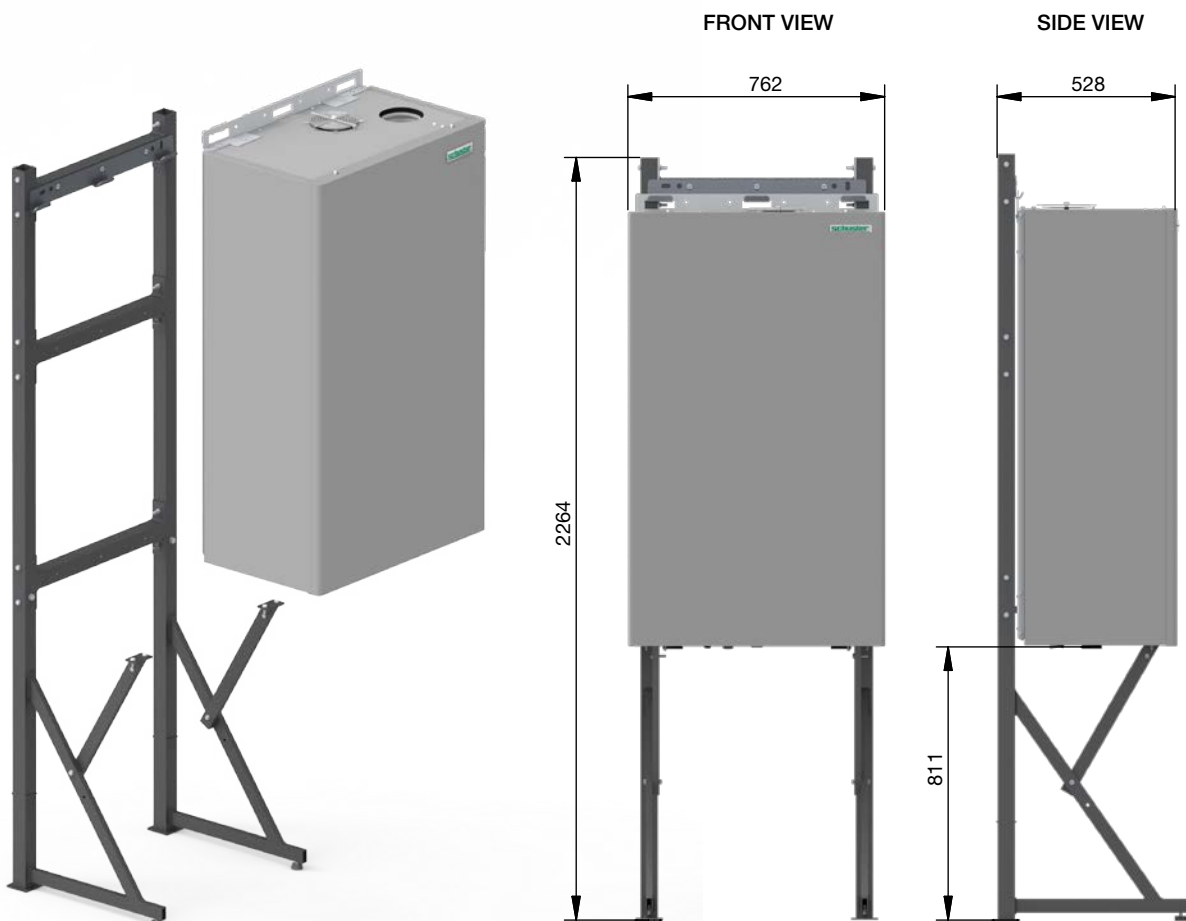


**DIMENSIONS OF TWO BWA 140 EXT IN BATTERY**

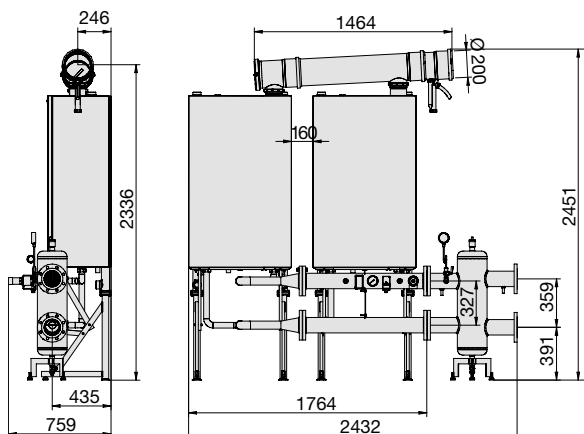

Operational data		BWA 140 EXT
Minimum Input on N.C.V. Qmin	kW	11
Nominal Input on N.C.V. Qn	kW	270
Nominal Output (60/80°C) Pn	kW	263.20
Nominal Output (30/50°C) Pcond	kW	271.36
Setting temperature of the gas cut-off valve	°C	98 <sup>+0</sup> <sub>-5</sub>

Warning: The flue ducts in plastic material (PPS) are suitable only for Indoor installations.


**DIMENSIONS OF THREE BWA 140 EXT IN BATTERY**

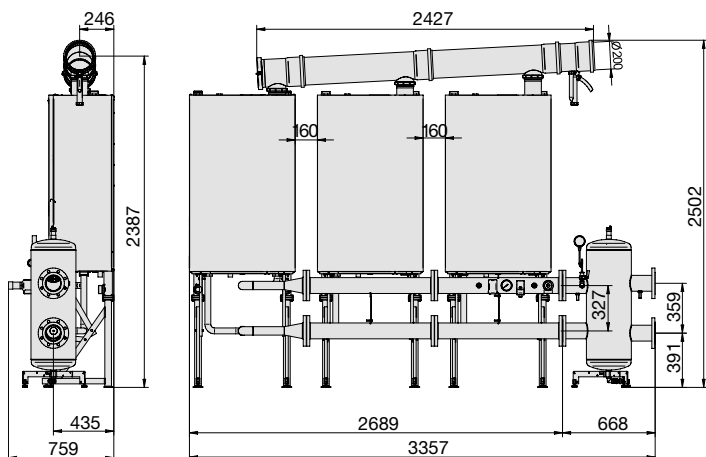

Operational data		BWA 140 EXT
Minimum Input on N.C.V. Qmin	kW	11
Nominal Input on N.C.V. Qn	kW	405
Nominal Output (60/80°C) Pn	kW	394.8
Nominal Output (30/50°C) Pcond	kW	407.04
Setting temperature of the gas cut-off valve	°C	98 <sup>+0</sup> <sub>-5</sub>

Warning: The flue ducts in plastic material (PPS) are suitable only for Indoor installations.

**DIMENSIONS OF FOUR BWA 140 EXT IN BATTERY**

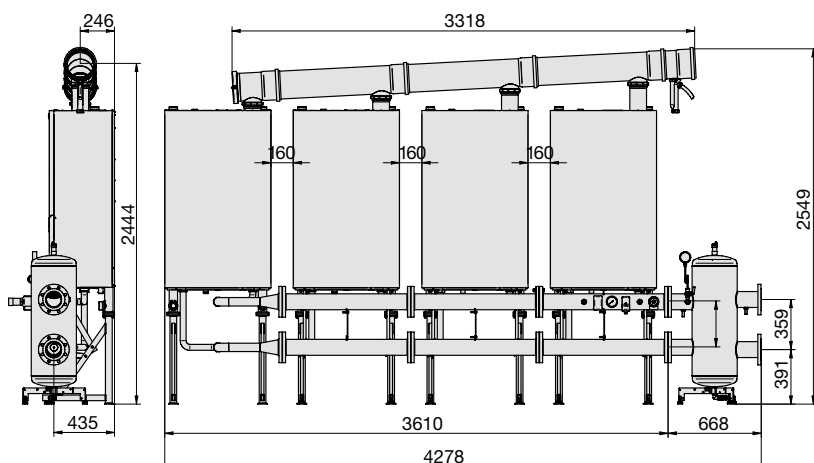


Operational data		BWA 140 EXT
Minimum Input on N.C.V. Qmin	kW	11
Nominal Input on N.C.V. Qn	kW	540
Nominal Output (60/80°C) Pn	kW	526.40
Nominal Output (30/50°C) Pcond	kW	542.72
Setting temperature of the gas cut-off valve	°C	98 <sup>+0</sup> <sub>-5</sub>

Warning: The flue ducts in plastic material (PPS) are suitable only for Indoor installations.

MATCHING PLATE EXCHANGERS


DIMENSIONS SERIES E 50W

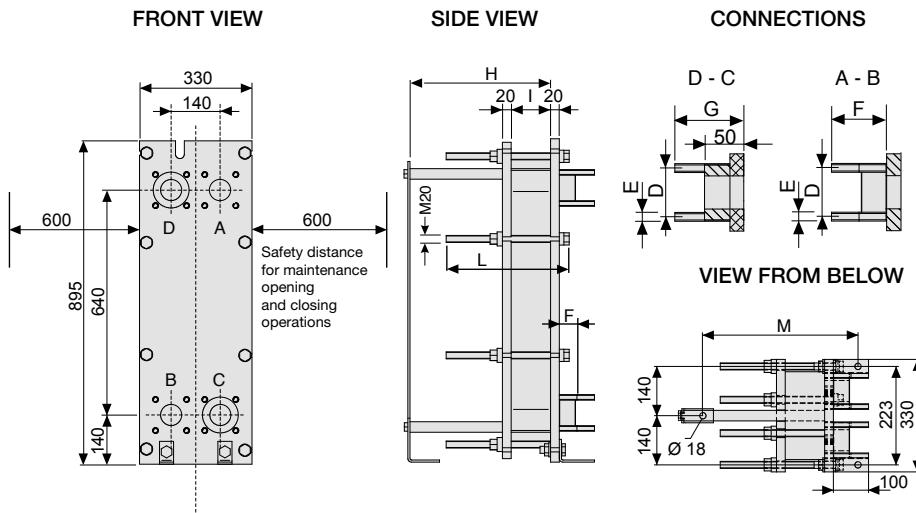

Plates	H	I	L	M
11	400	39	350	441
21	400	74	350	441
27	400	95	350	441
45	400	158	350	441

Connection	D	E	F	G
DN50 - 2"	125	M16	54	99

DIMENSIONS SERIES E 100W

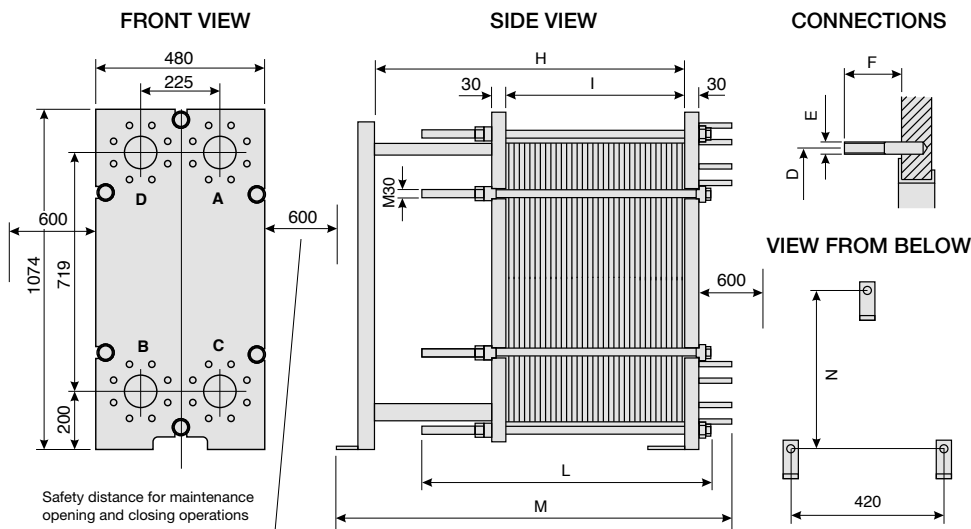


Plates	H	I	L	M	N
55	900	245	750	1110	905
63	900	281	750	1110	905
77	900	343	750	1110	905
87	900	388	750	1110	905

Connection	D	E	F
DN100 - 4"	180	M16	60


Number of boilers	Model	Number of plates	Pn kW	$\Delta p$ (m H <sub>2</sub> O) <sup>(*)</sup> primary / secondary	T. op. °C	Pmax bar	Volume H <sub>2</sub> O primary / secondary	Connections primary / secondary	Weight kg
1	<b>E50W-21Y</b>	21	135	1,4 / 3,2	-10 / +110	10	4 / 4	DN50 / DN50	144
2	<b>E50W-45X</b>	45	270	2,0 / 4,4	-10 / +110	10	9 / 9	DN50 / DN50	165
3	<b>E100W-55H</b>	55	405	0,6 / 1,4	-10 / +110	10	27 / 27	DN100 / DN100	365
4	<b>E100W-55H</b>	55	540	1,1 / 2,5	-10 / +110	10	27 / 27	DN100 / DN100	367

(\*)  $\Delta p$  alla Pn    Circuito primario 80°C - 65°C    Circuito secondario 60°C - 70°C


## DIFFERENTIAL PRESSURE SWITCH KIT

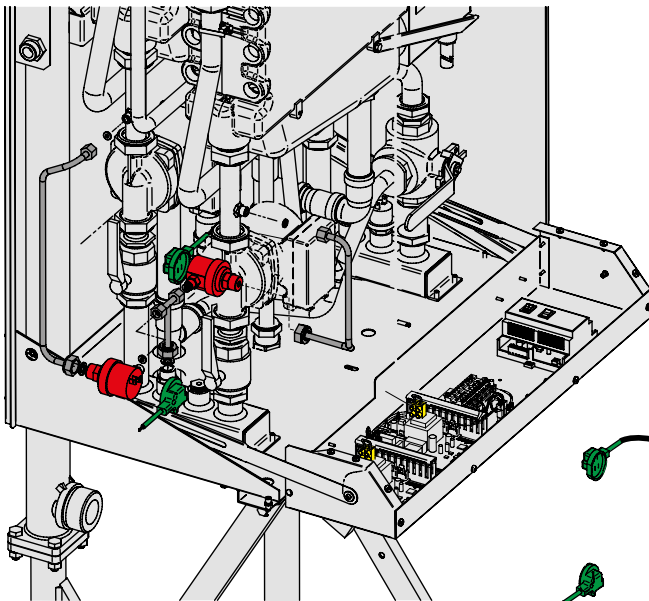

The Differential Pressure Switch kit is a safety device used for stopping the unit in case the pump is defective.

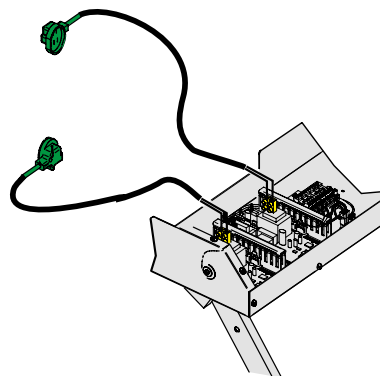

## MOUNTING SCHEME OF HYDRAULIC MANIFOLDS

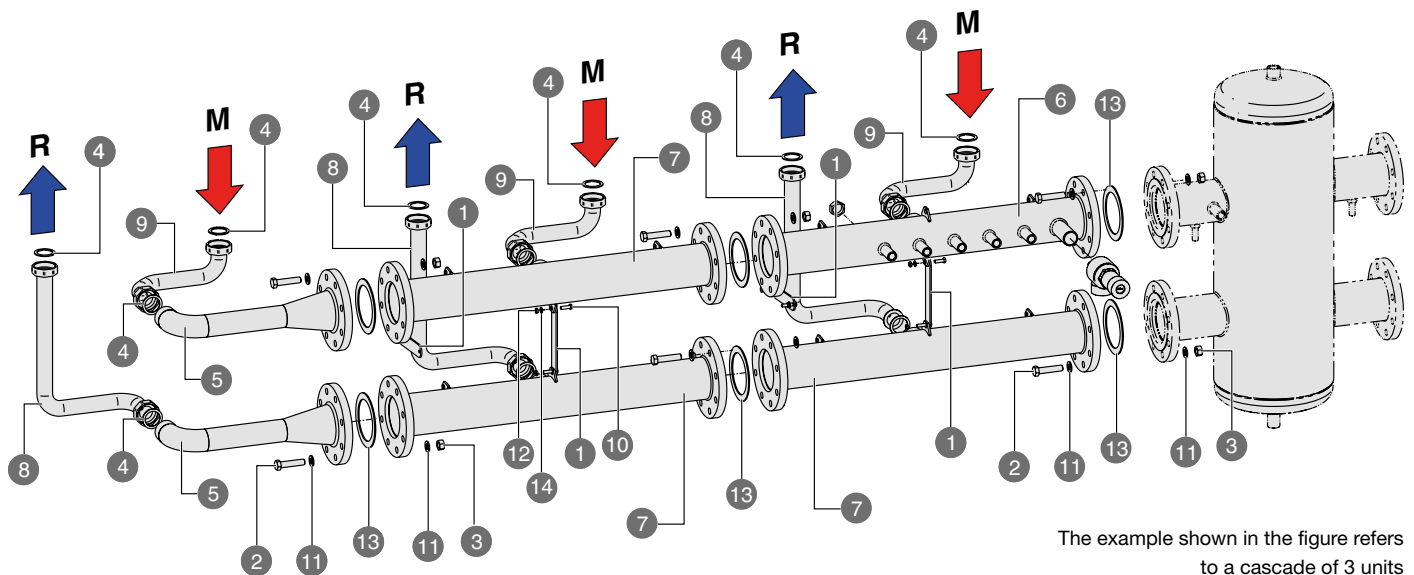

The example shown in the figure refers to a cascade of 3 units

Pos.	Description	No. of units		
		2x	3x	4x
1	Mounting bracket of the battery manifold	2	4	6
2	Screw M16	32	48	64
3	Nut M16	32	48	64
4	Gasket 2"	8	12	16
5	Return manifold of a single unit	2	2	2
6	Additional safety kit	1	1	1
7	Battery manifold	1	3	5

Pos.	Description	No. of units		
		2x	3x	4x
8	Return pipe between boiler & manifold	2	3	4
9	Flow pipe between boiler & manifold	2	3	4
10	Screw M10 x 40	4	6	8
11	Washer Ø 17 / 30	64	96	128
12	Nut M8	8	12	16
13	Gasket DN 100	4	6	8
14	Washer	8	12	16

## TECHNICAL DATA

ELECTRICAL, HYDRAULIC, INSTALLATION DIAGRAMS AND CONTROLLERS can be unloaded from the web site [www.schusterboilers.com](http://www.schusterboilers.com) at the page of the product

BWA 140 EXT		
Appliance category		$\eta_{2H3P}$
Modulation Ratio		1:12.3
Nominal Heat Input on P.C.I. $Q_n$	kW	135
Minimum Heat Input on P.C.I. $Q_{min}$	kW	11
Nominal Output (Tr 60 / Tm 80 °C) $P_n$	kW	131.60
Minimum Output (Tr 60 / Tm 80 °C) $P_n \text{ min}$	kW	10.5
Nominal Output (Tr 30 / Tm 50 °C) $P_{cond}$	kW	136.1
Minimum Output (Tr 30 / Tm 50 °C) $P_{cond \text{ min}}$	kW	11.5
Efficiency at max. output (Tr 60 / Tm 80°C)	%	97.48
Efficiency at min. output (Tr 60 / Tm 80°C)	%	95.1
Efficiency at max. output (Tr 30 / Tm 50°C)	%	100.8
Efficiency at min. output (Tr 30 / Tm 50°C)	%	104.3
Efficiency at 30% output (Tr 30°C)	%	108.3
Combustion efficiency with nominal load	%	97.5
Combustion efficiency with minimum load	%	98.35
Heat loss at casing with burner in operation ( $Q_{min}$ )	%	3.28
Heat loss at casing with burner in operation ( $Q_n$ )	%	0.02
Flue gas temperature $t_f - t_a$ (min)(*)	°C	33
Flue gas temperature $t_f - t_a$ (max)(*)	°C	55
Maximum allowable temperature	°C	100
Maximum operating temperature	°C	85
Flue gas mass flow rate (min)	kg/h	12.58
Flue gas mass flow rate (max)	kg/h	153.03
Excess $\lambda$ air	%	25.53
Flue losses with burner in operation (min)	%	1.65
Flue losses with burner in operation (max)	%	2.90
Minimum heating circuit pressure	bar	0.5
Maximum heating circuit pressure	bar	6
Water content	l	10
Gas Consumption Natural (20 mbar) gas G 20 a $Q_n$	m <sup>3</sup> /h	14.27
Gas Consumption Natural gas (20 mbar) G 20 a $Q_{min}$	m <sup>3</sup> /h	1.16
Gas Consumption G25 (supply pressure 25 mbar) $Q_n$	m <sup>3</sup> /h	16.60
Gas Consumption G25 (supply pressure 25 mbar) $Q_{min}$	m <sup>3</sup> /h	1.35
Gas Consumption G31 (supply pressure 37/50 mbar) $Q_n$	kg/h	10.48
Gas Consumption G31 (supply pressure 37/50 mbar) $Q_{min}$	kg/h	0.85
Max. available pressure at the chimney base	Pa	40
Condensate production max	kg/h	21.8
<b>Emissions</b>		
CO at Minimum Heat Input with 0% of O <sub>2</sub>	mg/kWh	139
NO <sub>x</sub> at Nominal Heat Input with 0% of O <sub>2</sub>	mg/kWh	58
NO <sub>x</sub> Class		6
<b>Electrical Data</b>		
Voltage/Frequency electric power supply	V/Hz	230/50
Fuse on main supply	A (R)	4
Insulation degree	IP	X5D

Room Temperature = 20°C. (\*) Temperatures detected with the unit in operation (Tr 60 / Tm 80°C)

Seasonal Efficiency  $\eta_s$  according to Directive 2009/125/EC for Outputs < = 400 kW. See Erp Table


Standstill heat losses at  $\Delta t$  30K –  $P_{\text{stby}}$  – See Erp Table

Standstill electrical consumption –  $P_{\text{sb}}$  – See Erp Table



## DATA ACCORDING TO ErP DIRECTIVE

ELECTRICAL, HYDRAULIC, INSTALLATION DIAGRAMS AND CONTROLLERS can be unloaded from the web site [www.schusterboilers.com](http://www.schusterboilers.com) at the page of the product

			BWA 140 EXT
NOMINAL HEAT OUTPUT	$P_n$	kW	132
SEASONAL SPACE HEATING ENERGY EFFICIENCY	$\eta_s$	%	93
<b>SEASONAL EFFICIENCY CLASS IN HEATING MODE</b>			<b>A</b>
<b>FOR CH ONLY AND COMBINATION BOILERS: USEFUL HEAT OUTPUT</b>			
USEFUL HEAT OUTPUT in high temperature regime (Tr 60 °C / Tm 80 °C)	$P_4$	kW	71.2
USEFUL EFFICIENCY AT NOM. HEAT OUTPUT in high-temperature regime (Tr 60°C / Tm 80°C)	$\eta_4$	%	87.8
USEFUL HEAT OUTPUT AT 30% OF NOM. HEAT OUTPUT in low-temperature regime (Tr 30°C)	$P_1$	kW	23.7
USEFUL EFFICIENCY AT 30% OF NOM. HEAT OUTPUT in low-temperature regime (Tr 30 °C)	$\eta_1$	%	97.6
RANGE-RATED BOILER: YES / NO			SI
<b>AUXILIARY ELECTRICITY CONSUMPTION</b>			
AT FULL LOAD	$e_{l_{max}}$	kW	0.474
AT PART LOAD	$e_{l_{min}}$	kW	0.159
IN STAND-BY MODE	$P_{SB}$	kW	0.007
<b>OTHER ITEMS</b>			
STAND-BY HEAT LOSS	$P_{stby}$	kW	2.68
EMISSIONS OF NITROGEN OXIDES referred to NCV & (GCV)	$NO_x$	mg/kWh	58 (52)
CONSUMPTION OF ANNUAL ELECTRICITY	$Q_{HE}$	GJ	653

4 BWA 140 EXT in battery


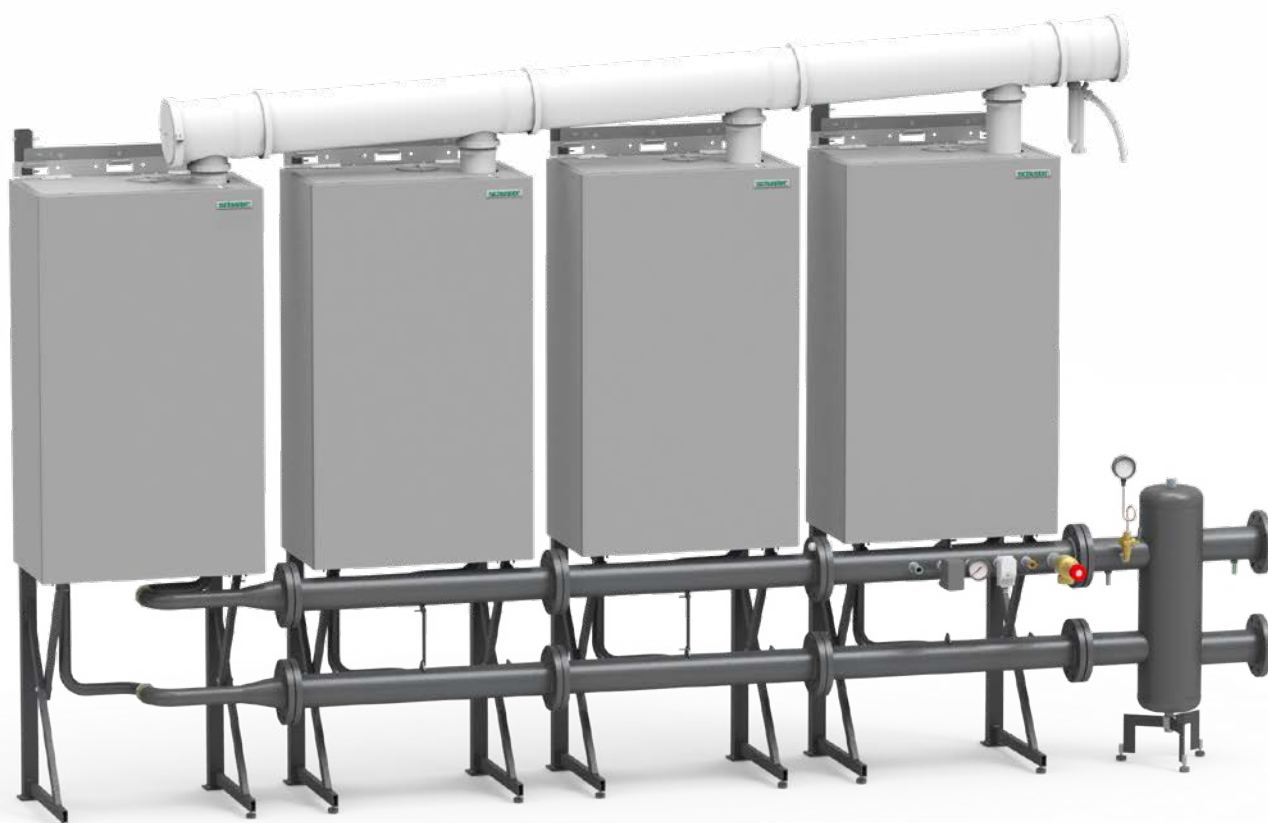


DIAGRAM OF FLOW RATE/PRESSURE AVAILABLE FOR INSTALLATION

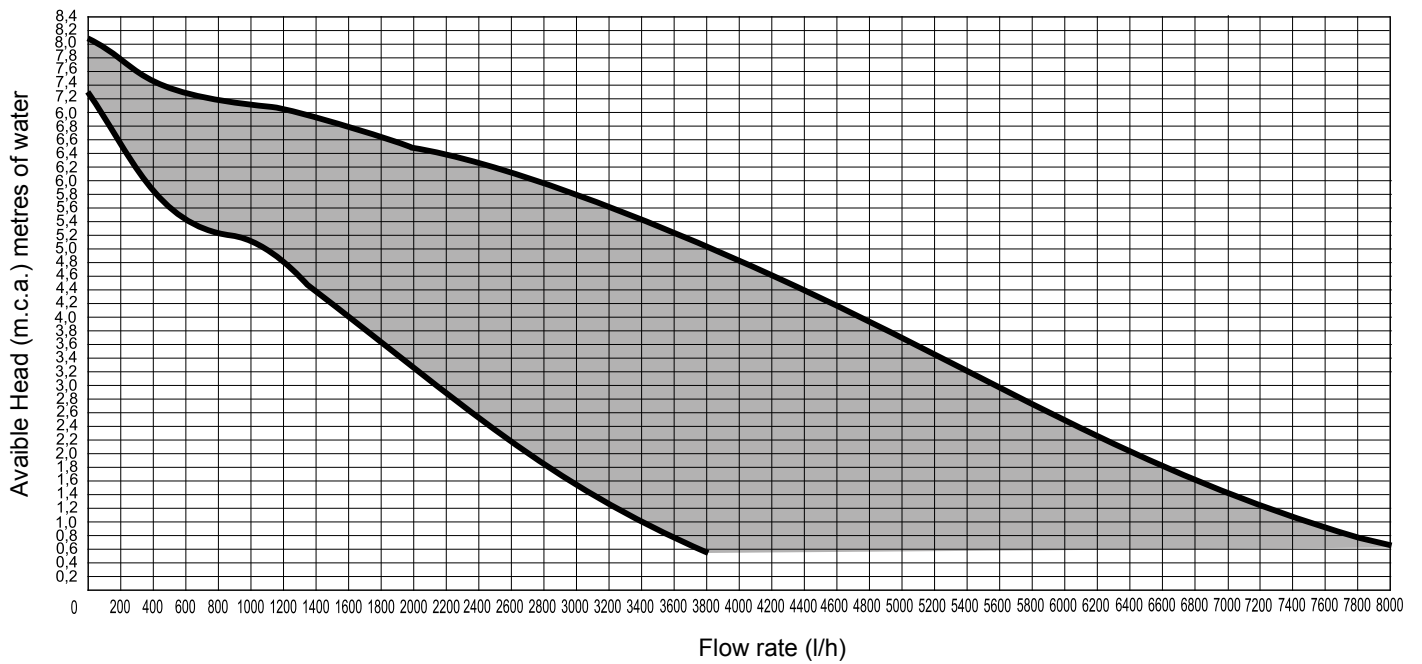

			BWA 140 EXT
Power supply		kW	135
Max flow rate demanded l/h ( $\Delta t$ 15 K)		l/h	7545
Nominal flow rate request ( $\Delta t$ 20 K)		l/h	5659